



产品手册

氮气弹簧

NITROGEN GAS SPRING
PRODUCTS MANUAL

嘉兴柏慕机电有限公司

目录

NM 系列

NM90	P. 2
NM200	P. 4

NU 系列

NU170	P. 8
NU320	P. 10
NU350	P. 12
NU500	P. 14
NU750	P. 16
NU1000	P. 18
NU1200	P. 20
NU1500	P. 22
NU2400	P. 24
NU4200	P. 26
NU6600	P. 28
NU9500	P. 30

NS 系列

NS150	P. 34
NS250	P. 36
NS500	P. 38

NS750	P. 40
NS1500	P. 42
NS3000	P. 44
NS5000	P. 46
NS7500	P. 48

NB 系列

NB500	P. 52
NB750	P. 54
NB1500	P. 56
NB3000	P. 58


NK 系列

NK400	P. 62
NK750	P. 64
NK1000	P. 66
NK1800	P. 68
NK3000	P. 70
NK4700	P. 72
NK7500	P. 74
NK12000	P. 76
NK18500	P. 78

Nitrogen Gas Spring Technology




Notes

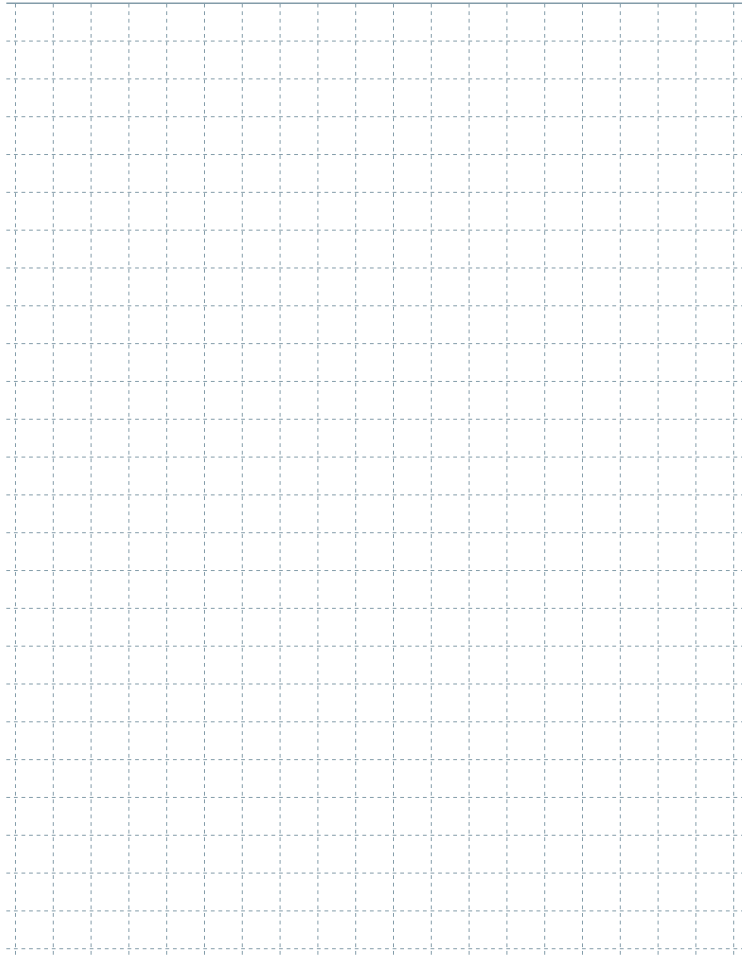

NM 系列

NM90
NM200




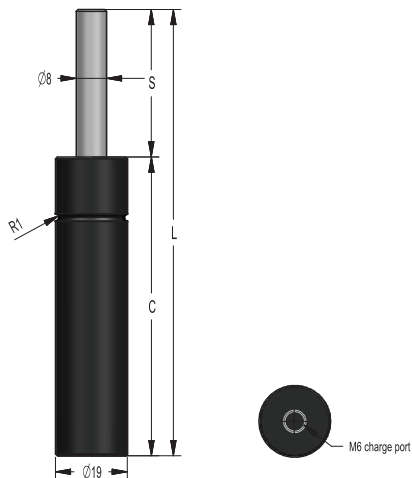


压力颜色标识	充气压力 (bar)	初始压力±5% (daN)
OR	10	5
PR	20	10
GR	60	30
BU	100	50
RD	140	70
YW	180	90
BK	10-180	5-90

型号	行程 (S)	总长 (L)	缸体 (C)	静态终止力 (daN)	动态终止力 (daN)	使用温度 (C°)	冲压次数 (SPM)	冲压速度 (m/s)
NM 90-7	7	56	49	1.16 x F0	1.30 x F0	0-80	~100-150	1.8
NM 90-10	10	62	52	1.19 x F0	1.36 x F0	0-80	~100-150	1.8
NM 90-13	13	68	55	1.22 x F0	1.40 x F0	0-80	~100-150	1.8
NM 90-15	15	72	57	1.23 x F0	1.42 x F0	0-80	~100-150	1.8
NM 90-25	25	92	67	1.28 x F0	1.50 x F0	0-80	~100-150	1.8
NM 90-38	38	118	80	1.31 x F0	1.55 x F0	0-80	~100-150	1.8
NM 90-50	50	142	92	1.33 x F0	1.58 x F0	0-80	~100-150	1.8
NM 90-63	63	172	109	1.33 x F0	1.57 x F0	0-80	~100-150	1.8
NM 90-80	80	205	125	1.33 x F0	1.59 x F0	0-80	~100-150	1.8
NM 90-100	100	245	145	1.35 x F0	1.61 x F0	0-80	~100-150	1.8
NM 90-125	125	295	170	1.36 x F0	1.63 x F0	0-80	~100-150	1.8

定单方式

氮气弹簧：NM90-7

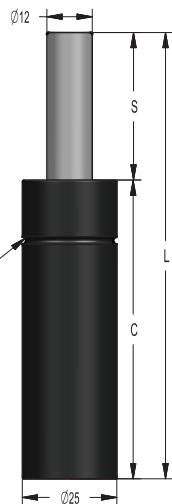

型号	行程 (S)	总长 (L)	缸体 (C)	静态终止力 (daN)	动态终止力 (daN)	使用温度 (C°)	冲压次数 (SPM)	冲压速度 (m/s)
NM 200-7	7	56	49	1.20 x F0	1.35 x F0	0-80	~50-80	1.8
NM 200-10	10	62	52	1.24 x F0	1.42 x F0	0-80	~50-80	1.8
NM 200-13	13	68	55	1.27 x F0	1.47 x F0	0-80	~50-80	1.8
NM 200-15	15	72	57	1.30 x F0	1.50 x F0	0-80	~50-80	1.8
NM 200-16	16	74	58	1.30 x F1	1.50 x F1	0-80	~50-80	1.8
NM 200-25	25	92	67	1.36 x F1	1.60 x F1	0-80	~50-80	1.8
NM 200-38	38	118	80	1.40 x F1	1.67 x F1	0-80	~50-80	1.8
NM 200-50	50	142	92	1.42 x F1	1.71 x F1	0-80	~50-80	1.8
NM 200-63	63	172	109	1.42 x F2	1.70 x F2	0-80	~50-80	1.8
NM 200-80	80	205	125	1.43 x F2	1.73 x F2	0-80	~50-80	1.8
NM 200-100	100	245	145	1.45 x F2	1.75 x F2	0-80	~50-80	1.8
NM 200-125	125	295	170	1.46 x F2	1.78 x F2	0-80	~50-80	1.8

压力颜色标识	充气压力 (bar)	初始压力±5% (daN)
OR	15	17
PR	25	28
GR	45	50
BU	90	100
RD	135	150
YW	180	200
BK	10-180	11-200

定单方式

氮气弹簧：NM200-7


Notes



NU 系列

NU170
NU320
NU350
NU500
NU750
NU1000
NU1200
NU1500
NU2400
NU4200
NU6600
NU9500




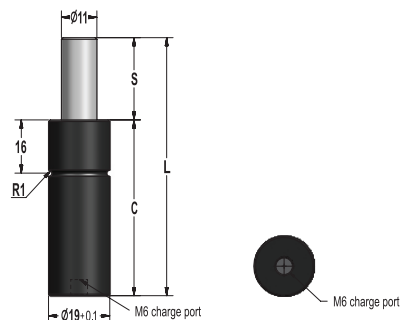


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 170-7	7	44	37	170±5% 180 bar	256	295	0-80	~40-100	1.8
NU 170-10	10	50	40		270	315	0-80	~40-100	1.8
NU 170-13	13	56	43		279	328	0-80	~40-100	1.8
NU 170-15	15	60	45		284	335	0-80	~40-100	1.8
NU 170-19	19	68	49		291	346	0-80	~40-100	1.8
NU 170-25	25	80	55		298	356	0-80	~40-100	1.8
NU 170-32	32	94	62		304	365	0-80	~40-100	1.8
NU 170-38	38	106	68		307	370	0-80	~40-100	1.8
NU 170-50	50	130	80		312	376	0-80	~40-100	1.8
NU 170-63	63	156	93		315	381	0-80	~40-100	1.8
NU 170-75	75	185	110		304	366	0-80	~40-100	1.8
NU 170-80	80	195	115		306	368	0-80	~40-100	1.8
NU 170-100	100	235	135		310	373	0-80	~40-100	1.8
NU 170-125	125	285	160		313	379	0-80	~40-100	1.8

适配件


NFCR-19



NF-19




NFCR-90



定单方式

氮气弹簧：NU170-7


适配件：NFCR-19

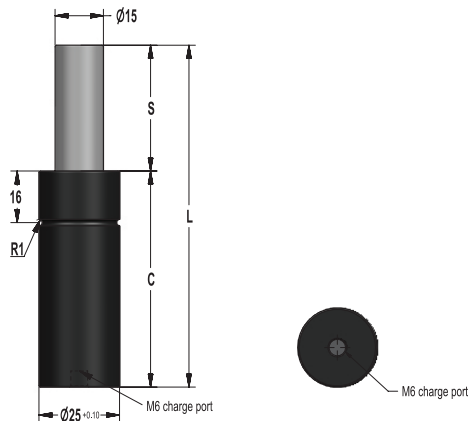


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 320-7	7	44	37	320±5% 180 bar	465	531	0-80	~40-100	1.8
NU 320-10	10	50	40		489	566	0-80	~40-100	1.8
NU 320-13	13	56	43		505	589	0-80	~40-100	1.8
NU 320-15	15	60	45		513	602	0-80	~40-100	1.8
NU 320-19	19	68	49		526	620	0-80	~40-100	1.8
NU 320-25	25	80	55		539	640	0-80	~40-100	1.8
NU 320-32	32	94	62		549	654	0-80	~40-100	1.8
NU 320-38	38	106	68		555	663	0-80	~40-100	1.8
NU 320-50	50	130	80		563	676	0-80	~40-100	1.8
NU 320-63	63	156	93		569	684	0-80	~40-100	1.8
NU 320-75	75	185	110		552	658	0-80	~40-100	1.8
NU 320-80	80	195	115		554	662	0-80	~40-100	1.8
NU 320-100	100	235	135		561	672	0-80	~40-100	1.8
NU 320-125	125	285	160		567	681	0-80	~40-100	1.8

适配件

NFCR-150




NFC-150



定单方式

氮气弹簧：NU320-7



适配件：NFCR-150

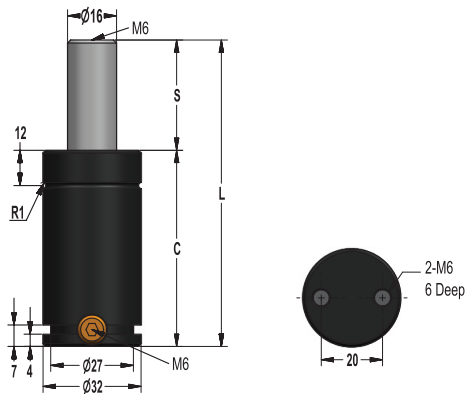



型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 350-10	10	50	40	360± 5% 180 bar	524	598	0-80	~20-100	1.8
NU 350-13	13	56	43		538	617	0-80	~20-100	1.8
NU 350-16	16	62	46		547	631	0-80	~20-100	1.8
NU 350-19	19	68	49		555	642	0-80	~20-100	1.8
NU 350-25	25	80	55		565	656	0-80	~20-100	1.8
NU 350-32	32	94	62		572	667	0-80	~20-100	1.8
NU 350-38	38	106	68		577	674	0-80	~20-100	1.8
NU 350-50	50	130	80		583	683	0-80	~20-100	1.8
NU 350-63	63	156	93		587	689	0-80	~20-100	1.8
NU 350-75	75	180	105		590	693	0-80	~20-100	1.8
NU 350-80	80	190	110		591	694	0-80	~20-100	1.8
NU 350-100	100	230	130		593	698	0-80	~20-100	1.8
NU 350-125	125	280	155		595	701	0-80	~20-100	1.8

适配件



NFC-MC-150



NFCS-32




NFFC-MC-150



定单方式

氮气弹簧：NU350-10


适配件：NFC-MC-150

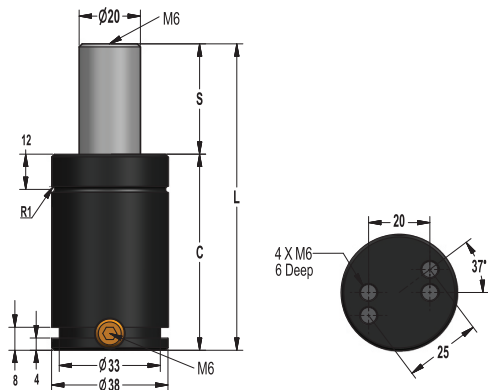


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 500-10	10	50	40	470±5% 150 bar	693	824	0-80	~20-100	1.8
NU 500-13	13	56	43		713	854	0-80	~20-100	1.8
NU 500-16	16	62	46		726	876	0-80	~20-100	1.8
NU 500-19	19	68	49		736	892	0-80	~20-100	1.8
NU 500-25	25	80	55		751	916	0-80	~20-100	1.8
NU 500-32	32	94	62		762	933	0-80	~20-100	1.8
NU 500-38	38	106	68		768	944	0-80	~20-100	1.8
NU 500-50	50	130	80		777	958	0-80	~20-100	1.8
NU 500-63	63	156	93		783	968	0-80	~20-100	1.8
NU 500-75	75	180	105		787	975	0-80	~20-100	1.8
NU 500-80	80	190	110		788	977	0-80	~20-100	1.8
NU 500-100	100	230	130		792	983	0-80	~20-100	1.8
NU 500-125	125	280	155		795	989	0-80	~20-100	1.8

适配件


NFC-250

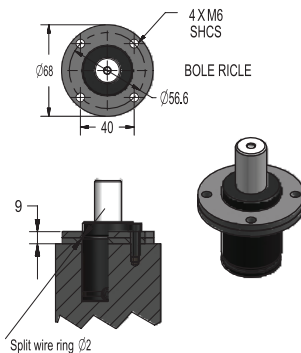

NFCS-250




NFFC-250



定单方式

氮气弹簧：NU500-10


适配件：NFC-250

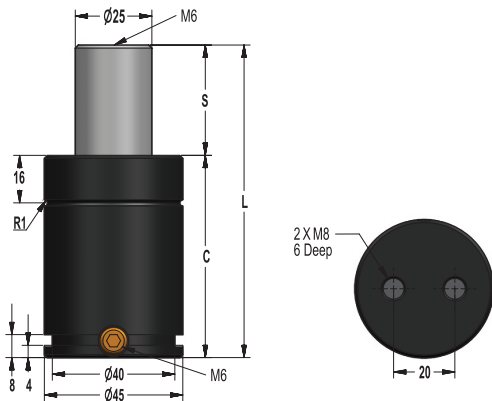


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 750-10	10	52	42	740±5% 150 bar	1091	1298	0-80	~20-100	1.8
NU 750-13	13	58	45		1125	1354	0-80	~20-100	1.8
NU 750-16	16	64	48		1151	1395	0-80	~20-100	1.8
NU 750-19	19	70	51		1170	1426	0-80	~20-100	1.8
NU 750-25	25	82	57		1198	1471	0-80	~20-100	1.8
NU 750-32	32	96	64		1220	1506	0-80	~20-100	1.8
NU 750-38	38	108	70		1232	1527	0-80	~20-100	1.8
NU 750-50	50	132	82		1250	1556	0-80	~20-100	1.8
NU 750-63	63	158	95		1262	1577	0-80	~20-100	1.8
NU 750-75	75	182	107		1270	1590	0-80	~20-100	1.8
NU 750-80	80	192	112		1273	1594	0-80	~20-100	1.8
NU 750-100	100	232	132		1281	1607	0-80	~20-100	1.8
NU 750-125	125	282	157		1287	1618	0-80	~20-100	1.8

适配件


NFC-500



NFCS-500




NFFC-500



定单方式

氮气弹簧：NU750-10


适配件：NFC-500

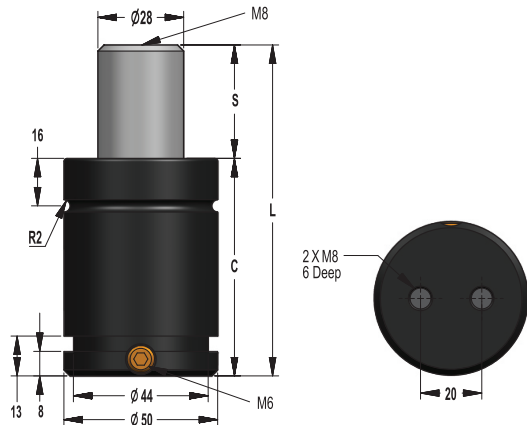


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 1000-10	10	58	48	920± 5% 150 bar	1300	1523	0-80	~20-100	1.8
NU 1000-13	13	64	51		1349	1599	0-80	~20-100	1.8
NU 1000-16	16	70	54		1386	1658	0-80	~20-100	1.8
NU 1000-19	19	76	57		1416	1705	0-80	~20-100	1.8
NU 1000-25	25	88	63		1460	1775	0-80	~20-100	1.8
NU 1000-32	32	102	70		1495	1832	0-80	~20-100	1.8
NU 1000-38	38	114	76		1517	1868	0-80	~20-100	1.8
NU 1000-50	50	138	88		1548	1919	0-80	~20-100	1.8
NU 1000-63	63	164	101		1570	1955	0-80	~20-100	1.8
NU 1000-75	75	188	113		1584	1978	0-80	~20-100	1.8
NU 1000-80	80	198	118		1589	1986	0-80	~20-100	1.8
NU 1000-100	100	238	138		1603	2011	0-80	~20-100	1.8
NU 1000-125	125	288	163		1616	2031	0-80	~20-100	1.8

适配件


NFC-750




NFCS-750




NFFC-750



NFMP-750




NFS-750



定单方式

氮气弹簧：NU1000-10


适配件：NFC-750

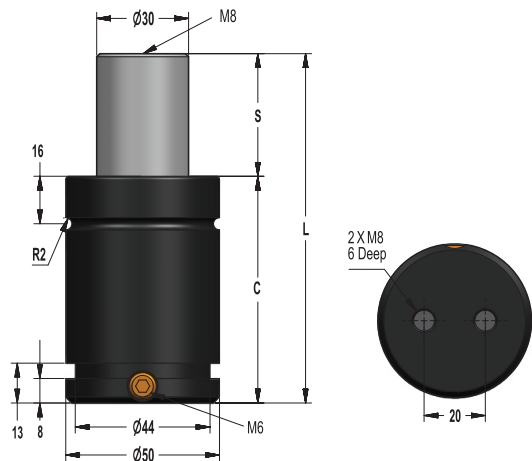


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 1200-10	10	58	48	1060±5% 170 bar	1494	1717	0-80	~20-100	1.8
NU 1200-13	13	64	51		1553	1802	0-80	~20-100	1.8
NU 1200-16	16	70	54		1597	1869	0-80	~20-100	1.8
NU 1200-19	19	76	57		1633	1922	0-80	~20-100	1.8
NU 1200-25	25	88	63		1685	2001	0-80	~20-100	1.8
NU 1200-32	32	102	70		1728	2066	0-80	~20-100	1.8
NU 1200-38	38	114	76		1754	2106	0-80	~20-100	1.8
NU 1200-50	50	138	88		1791	2163	0-80	~20-100	1.8
NU 1200-63	63	164	101		1817	2204	0-80	~20-100	1.8
NU 1200-75	75	188	113		1834	2230	0-80	~20-100	1.8
NU 1200-80	80	198	118		1840	2239	0-80	~20-100	1.8
NU 1200-100	100	238	138		1858	2267	0-80	~20-100	1.8
NU 1200-125	125	288	163		1873	2290	0-80	~20-100	1.8

适配件


NFC-750




NFCS-750




NFFC-750



NFMP-750




NFS-750



定单方式

氮气弹簧：NU1200-10


适配件：NFC-750

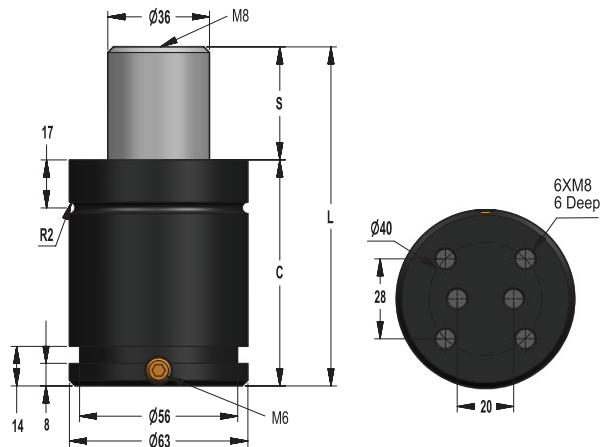


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 1500-10	10	64	54	1530±5% 150 bar	2074	2400	0-80	~20-100	1.8
NU 1500-13	13	70	57		2152	2521	0-80	~20-100	1.8
NU 1500-16	16	76	60		2213	2616	0-80	~20-100	1.8
NU 1500-19	19	82	63		2262	2693	0-80	~20-100	1.8
NU 1500-25	25	94	69		2336	2811	0-80	~20-100	1.8
NU 1500-32	32	108	76		2397	2908	0-80	~20-100	1.8
NU 1500-38	38	120	82		2435	2971	0-80	~20-100	1.8
NU 1500-50	50	144	94		2490	3059	0-80	~20-100	1.8
NU 1500-63	63	170	107		2529	3123	0-80	~20-100	1.8
NU 1500-75	75	194	119		2555	3165	0-80	~20-100	1.8
NU 1500-80	80	204	124		2563	3180	0-80	~20-100	1.8
NU 1500-100	100	244	144		2590	3224	0-80	~20-100	1.8
NU 1500-125	125	294	169		2613	3262	0-80	~20-100	1.8

适配件


FCX-1500



NFFX-1500



NFMPX-1500




定单方式

氮气弹簧：NU1500-10


适配件：FCX-1500

适配件


NFC-1500




NFCS-1500




NFFC-1500



NFMP-1500




NFS-1500




定单方式

氮气弹簧：NU2400-10

适配件：NFC-1500

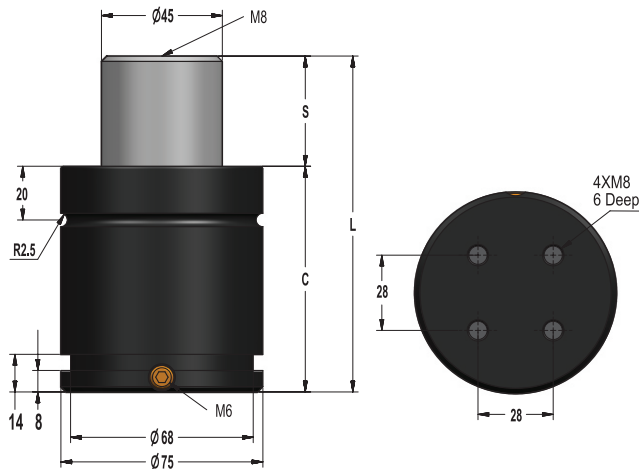


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 2400-10	10	65	55	2385±5% 150 bar	3264	3786	0-80	~20-100	1.8
NU 2400-13	13	71	58		3392	3984	0-80	~20-100	1.8
NU 2400-16	16	77	61		3493	4142	0-80	~20-100	1.8
NU 2400-19	19	83	64		3574	4271	0-80	~20-100	1.8
NU 2400-25	25	95	70		3698	4468	0-80	~20-100	1.8
NU 2400-32	32	109	77		3800	4632	0-80	~20-100	1.8
NU 2400-38	38	121	83		3864	4737	0-80	~20-100	1.8
NU 2400-50	50	145	95		3956	4887	0-80	~20-100	1.8
NU 2400-63	63	171	108		4022	4996	0-80	~20-100	1.8
NU 2400-75	75	195	120		4066	5068	0-80	~20-100	1.8
NU 2400-80	80	205	125		4081	5093	0-80	~20-100	1.8
NU 2400-100	100	245	145		4127	5169	0-80	~20-100	1.8
NU 2400-125	125	295	170		4166	5234	0-80	~20-100	1.8

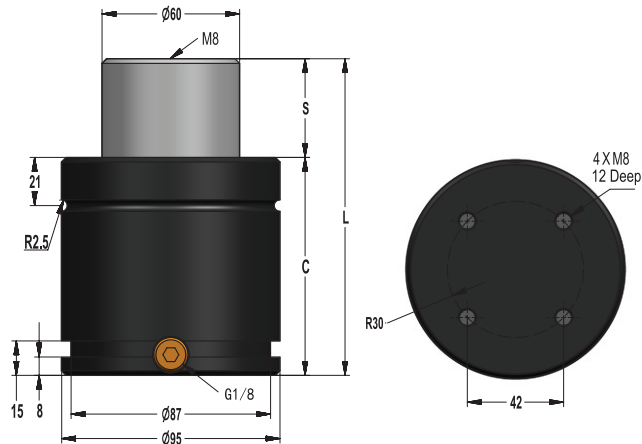


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 4200-16	16	90	74	4240 ±5% 150 bar	6080	7162	0-80	~20-100	1.8
NU 4200-19	19	96	77		6246	7421	0-80	~20-100	1.8
NU 4200-25	25	108	83		6506	7834	0-80	~20-100	1.8
NU 4200-32	32	122	90		6729	8194	0-80	~20-100	1.8
NU 4200-38	38	134	96		6876	8432	0-80	~20-100	1.8
NU 4200-50	50	158	108		7091	8783	0-80	~20-100	1.8
NU 4200-63	63	184	121		7251	9048	0-80	~20-100	1.8
NU 4200-75	75	208	133		7359	9227	0-80	~20-100	1.8
NU 4200-80	80	218	138		7396	9288	0-80	~20-100	1.8
NU 4200-100	100	258	158		7512	9483	0-80	~20-100	1.8
NU 4200-125	125	308	183		7612	9651	0-80	~20-100	1.8

适配件


NFC-3000




NFCS-3000




NFFC-3000



NFMP-3000




NFS-3000



定单方式

氮气弹簧：NU4200-16


适配件：NFC-3000

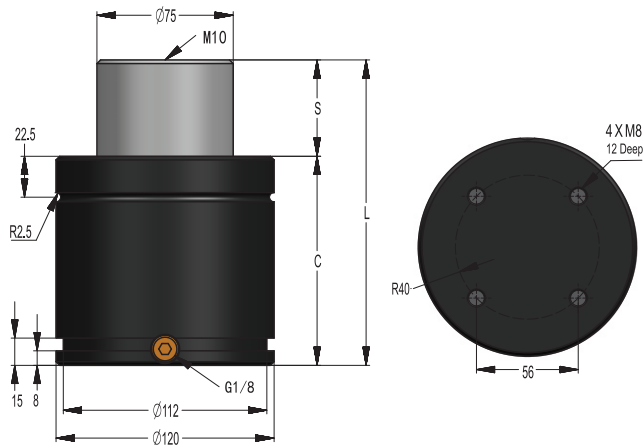


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 6600-16	16	100	84	6630±5% 150 bar	9125	10607	0-80	~20-100	1.8
NU 6600-19	19	106	87		9376	10995	0-80	~20-100	1.8
NU 6600-25	25	118	93		9779	11628	0-80	~20-100	1.8
NU 6600-32	32	132	100		10136	12195	0-80	~20-100	1.8
NU 6600-38	38	144	106		10375	12578	0-80	~20-100	1.8
NU 6600-50	50	168	118		10733	13157	0-80	~20-100	1.8
NU 6600-63	63	194	131		11006	13604	0-80	~20-100	1.8
NU 6600-75	75	218	143		11193	13911	0-80	~20-100	1.8
NU 6600-80	80	228	148		11258	14018	0-80	~20-100	1.8
NU 6600-100	100	268	168		11463	14359	0-80	~20-100	1.8
NU 6600-125	125	318	193		11642	14656	0-80	~20-100	1.8

适配件


NFFC-5000




NFC-5000




NFCS-5000



NFMP-5000




NFS-5000



定单方式

氮气弹簧：NU6600-16


适配件：NFC-5000

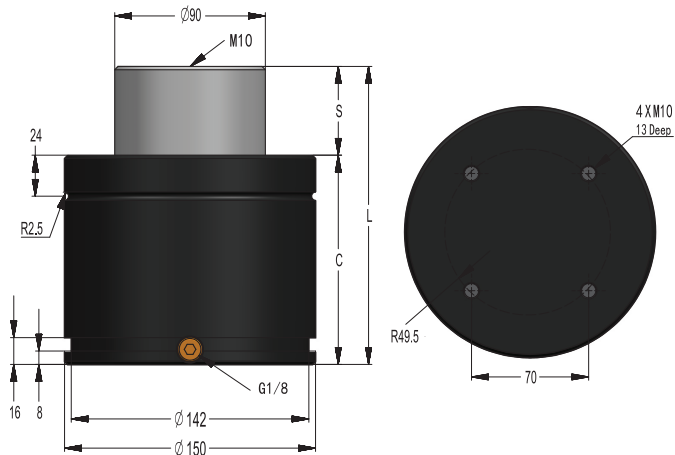


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NU 9500-19	19	116	97	9540±5% 150 bar	13101	15214	0-80	~20-100	1.8
NU 9500-25	25	128	103		13637	16044	0-80	~20-100	1.8
NU 9500-32	32	142	110		14112	16792	0-80	~20-100	1.8
NU 9500-38	38	154	116		14432	17299	0-80	~20-100	1.8
NU 9500-50	50	178	128		14914	18070	0-80	~20-100	1.8
NU 9500-63	63	204	141		15283	18666	0-80	~20-100	1.8
NU 9500-75	75	228	153		15536	19078	0-80	~20-100	1.8
NU 9500-80	80	238	158		15625	19222	0-80	~20-100	1.8
NU 9500-100	100	278	178		15905	19681	0-80	~20-100	1.8
NU 9500-125	125	328	203		16148	20082	0-80	~20-100	1.8

适配件


NFC-7500




NFCS-7500




NFFC-7500



NFMP-7500



NFS-7500



定单方式

氮气弹簧：NU9500-19

适配件：NFC-7500


Notes



NS 系列

NS150
NS250
NS500
NS750
NS1500
NS3000
NS5000
NS7500





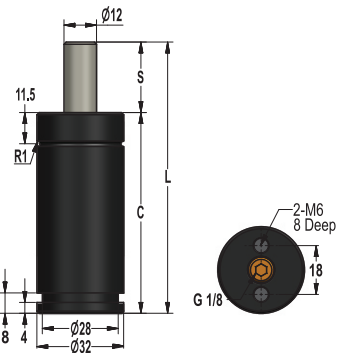



型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NS 150-10	10	70	60	170 ± 5% 150 bar	191	207	0-80	~80-100	1.8
NS 150-13	13	76	63		194	212	0-80	~80-100	1.8
NS 150-16	15	82	67		197	216	0-80	~80-100	1.8
NS 150-25	25	100	75		202	224	0-80	~80-100	1.8
NS 150-38	38	126	88		207	231	0-80	~80-100	1.8
NS 150-50	50	150	100		209	235	0-80	~80-100	1.8
NS 150-63	63	177	114		211	238	0-80	~80-100	1.8
NS 150-80	80	210	130		213	240	0-80	~80-100	1.8
NS 150-100	100	250	150		214	242	0-80	~80-100	1.8
NS 150-125	125	300	175		216	244	0-80	~80-100	1.8

适配件



NFC-MC-150



NFCS-32




NFFC-MC-150



定单方式

氮气弹簧：NS150-10


适配件：NFC-MC-150

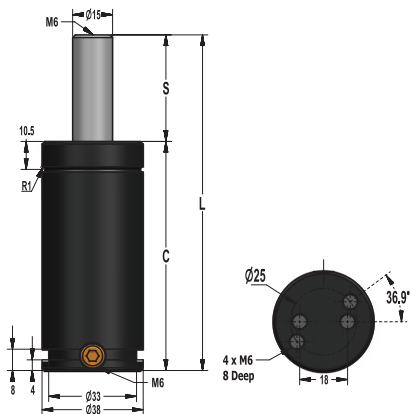


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NS 250-10	10	70	60	260 ±5% 150 bar	303	332	0-80	~80-100	1.8
NS 250-13	13	76	63		309	340	0-80	~80-100	1.8
NS 250-16	15	82	67		315	348	0-80	~80-100	1.8
NS 250-19	19	88	69		319	354	0-80	~80-100	1.8
NS 250-25	25	100	75		325	364	0-80	~80-100	1.8
NS 250-38	38	126	88		334	377	0-80	~80-100	1.8
NS 250-50	50	250	200		339	385	0-80	~80-100	1.8
NS 250-63	63	177	114		343	391	0-80	~80-100	1.8
NS 250-80	80	210	130		346	395	0-80	~80-100	1.8
NS 250-100	100	250	150		349	399	0-80	~80-100	1.8
NS 250-125	125	300	175		351	403	0-80	~80-100	1.8

适配件


NFC-250

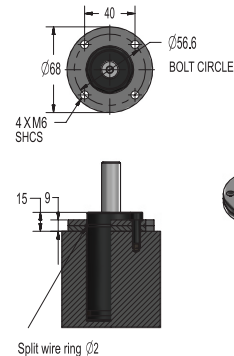

NFCS-250

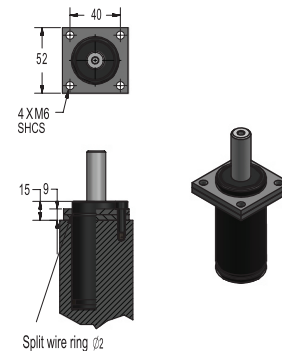


NFFC-250



定单方式

氮气弹簧：NS250-10

适配件：NFC-250



470 ± 5%
150 bar

NFC-500



4 X M8 SHCS



64 50

13

Split wire ring Ø2





适配件：NFC-500

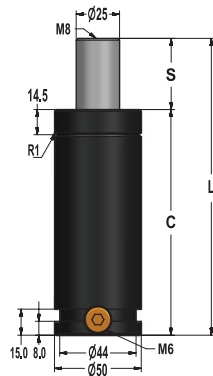



型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NS 750-13	13	121	108	740 ±5% 150 bar	902	1009	0-80	~15-50	1.8
NS 750-25	25	145	120		977	1122	0-80	~15-50	1.8
NS 750-38	38	171	133		1023	1192	0-80	~15-50	1.8
NS 750-50	50	195	145		1050	1235	0-80	~15-50	1.8
NS 750-63	63	222	159		1072	1269	0-80	~15-50	1.8
NS 750-75	75	245	170		1086	1291	0-80	~15-50	1.8
NS 750-80	80	255	175		1091	1299	0-80	~15-50	1.8
NS 750-88	88	270	182		1101	1314	0-80	~15-50	1.8
NS 750-100	100	295	195		1107	1324	0-80	~15-50	1.8
NS 750-113	113	320	207		1117	1340	0-80	~15-50	1.8
NS 750-125	125	345	220		1121	1346	0-80	~15-50	1.8
NS 750-138	138	270	132		1131	1363	0-80	~15-50	1.8
NS 750-150	150	395	245		1140	1378	0-80	~15-50	1.8
NS 750-160	160	415	255		1149	1391	0-80	~15-50	1.8
NS 750-175	175	445	270		1160	1408	0-80	~15-50	1.8
NS 750-200	200	495	295		1175	1434	0-80	~15-50	1.8
NS 750-225	225	545	320		1188	1455	0-80	~15-50	1.8
NS 750-250	250	595	345		1199	1472	0-80	~15-50	1.8
NS 750-275	275	645	370		1208	1488	0-80	~15-50	1.8
NS 750-300	300	695	395		1216	1501	0-80	~15-50	1.8

适配件



NFC-750





NFCS-750



NFFC-750





NFMP-750



定单方式

氮气弹簧：NS750-13


适配件：NFC-750




型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NS 1500-13	13	135	122	1530 ± 5% 150 bar	1819	2016	0-80	~15-50	1.8
NS 1500-25	25	160	135		1925	2174	0-80	~15-50	1.8
NS 1500-38	38	186	148		2000	2287	0-80	~15-50	1.8
NS 1500-50	50	210	160		2045	2355	0-80	~15-50	1.8
NS 1500-63	63	237	174		2080	2409	0-80	~15-50	1.8
NS 1500-75	75	260	185		2102	2443	0-80	~15-50	1.8
NS 1500-80	80	270	190		2110	2455	0-80	~15-50	1.8
NS 1500-88	88	285	197		2130	2486	0-80	~15-50	1.8
NS 1500-100	100	310	210		2136	2495	0-80	~15-50	1.8
NS 1500-113	113	335	222		2151	2520	0-80	~15-50	1.8
NS 1500-125	125	360	235		2158	2529	0-80	~15-50	1.8
NS 1500-138	138	385	247		2169	2548	0-80	~15-50	1.8
NS 1500-150	150	410	260		2173	2554	0-80	~15-50	1.8
NS 1500-160	160	430	270		2178	2562	0-80	~15-50	1.8
NS 1500-175	175	460	285		2185	2572	0-80	~15-50	1.8
NS 1500-200	200	510	310		2198	2592	0-80	~15-50	1.8
NS 1500-225	225	560	335		2219	2625	0-80	~15-50	1.8
NS 1500-250	250	610	360		2236	2652	0-80	~15-50	1.8
NS 1500-275	275	660	385		2251	2676	0-80	~15-50	1.8
NS 1500-300	300	710	410		2264	2696	0-80	~15-50	1.8

适配件


NFC-1500




NFCS-1500




NFFC-1500



NFMP-1500




NFS-1500



定单方式

氮气弹簧：NS1500-13



适配件：NFC-1500

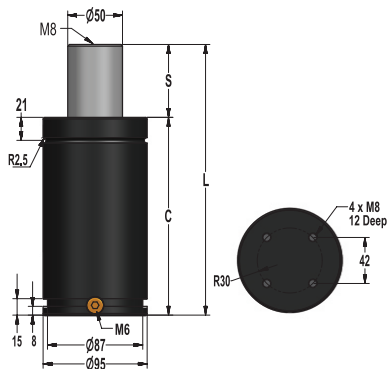



型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NS 3000-13	13	145	132	2945 ± 5% 150 bar	3538	3917	0-80	~15-50	1.8
NS 3000-25	25	170	145		3775	4286	0-80	~15-50	1.8
NS 3000-38	38	196	158		3955	4559	0-80	~15-50	1.8
NS 3000-50	50	220	170		4067	4732	0-80	~15-50	1.8
NS 3000-63	63	247	184		4158	4873	0-80	~15-50	1.8
NS 3000-75	75	270	195		4216	4964	0-80	~15-50	1.8
NS 3000-80	80	280	200		4238	4997	0-80	~15-50	1.8
NS 3000-88	88	295	207		4277	5059	0-80	~15-50	1.8
NS 3000-100	100	320	220		4307	5105	0-80	~15-50	1.8
NS 3000-113	113	345	232		4348	5171	0-80	~15-50	1.8
NS 3000-125	125	370	245		4367	5201	0-80	~15-50	1.8
NS 3000-138	138	395	257		4398	5250	0-80	~15-50	1.8
NS 3000-150	150	420	270		4411	5270	0-80	~15-50	1.8
NS 3000-160	160	440	280		4425	5292	0-80	~15-50	1.8
NS 3000-175	175	470	295		4443	5322	0-80	~15-50	1.8
NS 3000-200	200	520	320		4469	5362	0-80	~15-50	1.8
NS 3000-225	225	570	345		4489	5395	0-80	~15-50	1.8
NS 3000-250	250	620	370		4506	5422	0-80	~15-50	1.8
NS 3000-275	275	670	395		4520	5444	0-80	~15-50	1.8
NS 3000-300	300	720	420		4532	5463	0-80	~15-50	1.8

SN


NFCS-3000




NFMP-3000



NFS-3000




适配件：NFC-3000

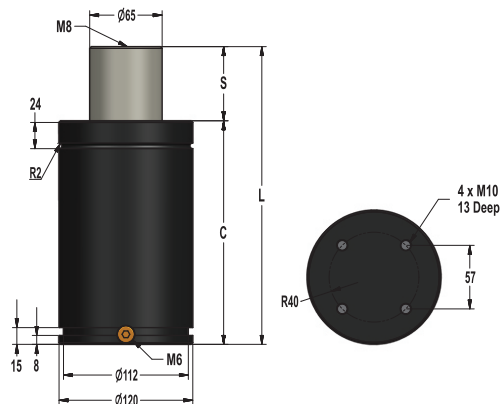


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NS 5000-25	25	190	165	4980 ± 5% 150 bar	6316	7148	0-80	~15-50	1.8
NS 5000-38	38	216	178		6652	7657	0-80	~15-50	1.8
NS 5000-50	50	240	190		6872	7994	0-80	~15-50	1.8
NS 5000-63	63	267	204		7077	8313	0-80	~15-50	1.8
NS 5000-75	75	290	215		7176	8467	0-80	~15-50	1.8
NS 5000-80	80	300	220		7221	8537	0-80	~15-50	1.8
NS 5000-88	88	315	227		7300	8662	0-80	~15-50	1.8
NS 5000-100	100	340	240		7367	8768	0-80	~15-50	1.8
NS 5000-113	113	365	252		7454	8906	0-80	~15-50	1.8
NS 5000-125	125	390	265		7499	8977	0-80	~15-50	1.8
NS 5000-138	138	415	277		7564	9081	0-80	~15-50	1.8
NS 5000-150	150	440	290		7595	9130	0-80	~15-50	1.8
NS 5000-160	160	460	300		7627	9181	0-80	~15-50	1.8
NS 5000-175	175	490	315		7668	9247	0-80	~15-50	1.8
NS 5000-200	200	540	340		7726	9340	0-80	~15-50	1.8
NS 5000-225	225	590	365		7773	9415	0-80	~15-50	1.8
NS 5000-250	250	640	390		7811	9477	0-80	~15-50	1.8
NS 5000-275	275	690	415		7843	9529	0-80	~15-50	1.8
NS 5000-300	300	740	440		7871	9573	0-80	~15-50	1.8

适配件


NFC-5000




NFCS-5000




NFFC-5000



NFMP-5000




NFS-5000



定单方式

氮气弹簧：NS5000-25


适配件：NFC-5000

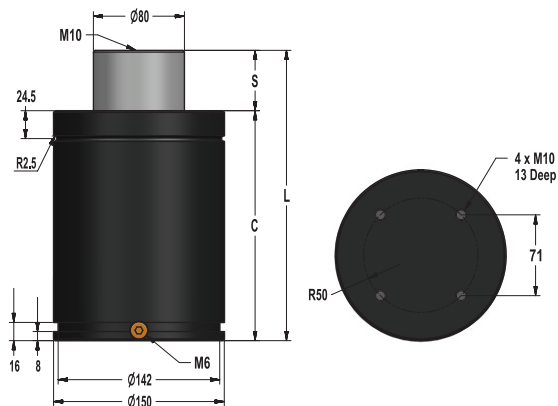


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NS 7500-25	25	205	180	7540 ± 5% 150 bar	9330	10472	0-80	~15-50	1.8
NS 7500-38	38	231	193		9809	11192	0-80	~15-50	1.8
NS 7500-50	50	255	205		10129	11679	0-80	~15-50	1.8
NS 7500-63	63	282	219		10400	12095	0-80	~15-50	1.8
NS 7500-75	75	305	230		10581	12375	0-80	~15-50	1.8
NS 7500-80	80	315	235		10648	12480	0-80	~15-50	1.8
NS 7500-88	88	330	242		10778	12682	0-80	~15-50	1.8
NS 7500-100	100	355	255		10871	12828	0-80	~15-50	1.8
NS 7500-113	113	380	267		11013	13051	0-80	~15-50	1.8
NS 7500-125	125	405	280		11073	13146	0-80	~15-50	1.8
NS 7500-138	138	430	292		11182	13318	0-80	~15-50	1.8
NS 7500-150	150	455	305		11222	13382	0-80	~15-50	1.8
NS 7500-160	160	475	315		11272	12459	0-80	~15-50	1.8
NS 7500-175	175	505	330		11337	13563	0-80	~15-50	1.8
NS 7500-200	200	555	355		11427	13707	0-80	~15-50	1.8
NS 7500-225	225	605	380		11501	13824	0-80	~15-50	1.8
NS 7500-250	250	655	405		11562	13921	0-80	~15-50	1.8
NS 7500-275	275	705	430		11613	14003	0-80	~15-50	1.8
NS 7500-300	300	755	455		11657	14073	0-80	~15-50	1.8

适配件


NFC-7500




NFCS-7500




NFFC-7500



NFMP-7500



NFS-7500



定单方式

氮气弹簧：NS7500-25

适配件：NFC-7500


Notes



NB 系列

NB500
NB750
NB1500
NB3000





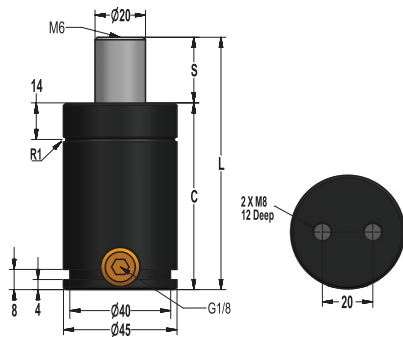



型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NB 500-6	6	62	56	470 ± 5% 150 bar	579	648	0-80	~40-100	1.8
NB 500-13	13	76	63		622	714	0-80	~40-100	1.8
NB 500-19	19	88	69		645	749	0-80	~40-100	1.8
NB 500-25	25	100	75		660	772	0-80	~40-100	1.8
NB 500-38	38	126	88		680	802	0-80	~40-100	1.8
NB 500-50	50	150	100		690	819	0-80	~40-100	1.8
NB 500-63	63	176	113		669	786	0-80	~40-100	1.8
NB 500-80	80	210	130		678	799	0-80	~40-100	1.8
NB 500-100	100	250	150		687	813	0-80	~40-100	1.8
NB 500-125	125	300	175		694	825	0-80	~40-100	1.8

适配件



NFC-500



NFCS-500




NFFC-500



定单方式

氮气弹簧：NB500-6


适配件：NFC-500

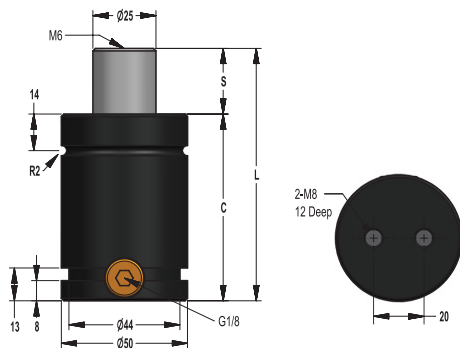


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NB 750-6	6	62	56	740 ± 5% 150 bar	909	1019	0-80	~30-80	1.8
NB 750-13	13	76	63		995	1149	0-80	~30-80	1.8
NB 750-19	19	88	69		1035	1212	0-80	~30-80	1.8
NB 750-25	25	100	75		1062	1253	0-80	~30-80	1.8
NB 750-38	38	126	88		1096	1307	0-80	~30-80	1.8
NB 750-50	50	150	100		1114	1336	0-80	~30-80	1.8
NB 750-63	63	176	113		1128	1357	0-80	~30-80	1.8
NB 750-80	80	210	130		1139	1375	0-80	~30-80	1.8
NB 750-100	100	250	150		1148	1390	0-80	~30-80	1.8
NB 750-125	125	300	175		1155	1401	0-80	~30-80	1.8

适配件


NFC-750




NFCS-750




NFFC-750



NFMP-750




NFS-750



定单方式

氮气弹簧：NB750-6


适配件：NFC-750

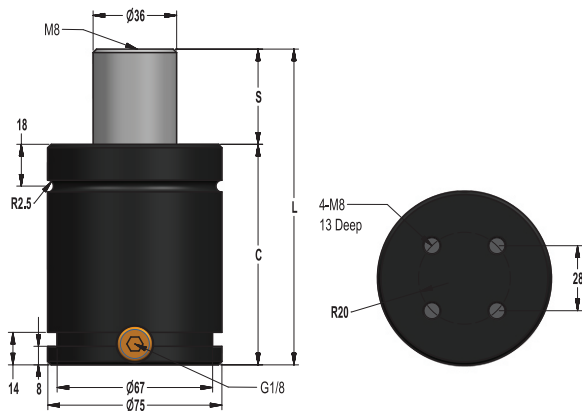


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NB 1500-25	25	110	85	1530 ± 5% 150 bar	2235	2651	0-80	~20-80	1.8
NB 1500-38	38	136	98		2328	2798	0-80	~20-80	1.8
NB 1500-50	50	160	110		2380	2880	0-80	~20-80	1.8
NB 1500-63	63	186	123		2417	2941	0-80	~20-80	1.8
NB 1500-80	80	220	140		2450	2994	0-80	~20-80	1.8
NB 1500-100	100	260	160		2476	3036	0-80	~20-80	1.8

适配件


NFC-1500




NFCS-1500




NFFC-1500



NFMP-1500



NFS-1500




定单方式

氮气弹簧：NB1500-25


适配件：NFC-1500

适配件


NFC-3000




NFCS-3000




NFFC-3000



NFMP-3000




NFS-3000



定单方式

氮气弹簧：NB3000-25

适配件：NFC-3000

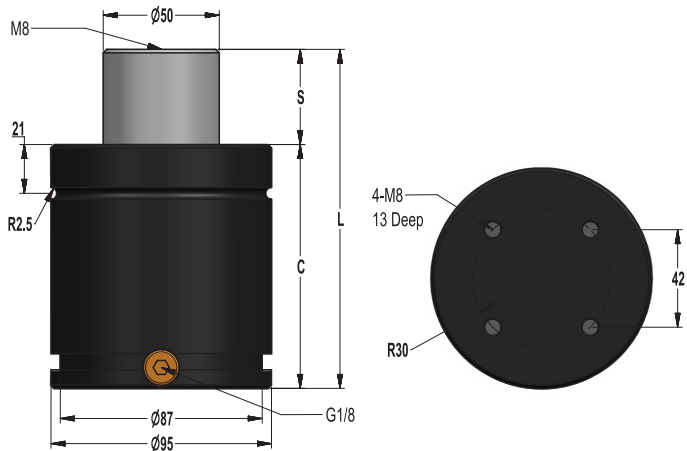

型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NB 3000-25	25	120	95	2945 ± 5% 150 ba	4860	5995	0-80	~15-60	1.8
NB 3000-38	38	146	108		5101	6391	0-80	~15-60	1.8
NB 3000-50	50	170	120		5233	6612	0-80	~15-60	1.8
NB 3000-63	63	196	133		5328	6773	0-80	~15-60	1.8
NB 3000-80	80	230	150		5413	6916	0-80	~15-60	1.8
NB 3000-100	100	270	170		5479	7028	0-80	~15-60	1.8


Notes



NK 系列

NK400
NK750
NK1000
NK1800
NK3000
NK4700
NK7500
NK12000
NK18500







型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NK 400-6	6	56	50	425 ± 5% 150 bar	789	1011	0-80	~50-100	1.8
NK 400-10	10	70	60		871	1153	0-80	~50-100	1.8
NK 400-16	16	91	75		881	1171	0-80	~50-100	1.8
NK 400-25	25	120	95		876	1162	0-80	~50-100	1.8
NK 400-32	32	140	108		907	1217	0-80	~50-100	1.8
NK 400-40	40	165	125		907	1217	0-80	~50-100	1.8
NK 400-50	50	195	145		919	1238	0-80	~50-100	1.8

适配件

NFC-150




NFCR-150



定单方式

氮气弹簧：NK400-6



适配件：NFC-150

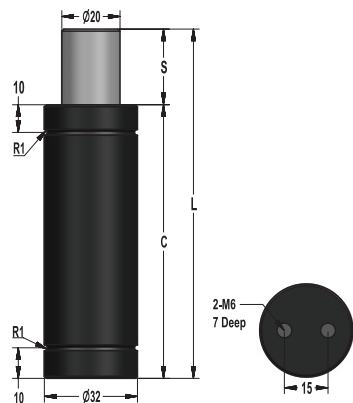



型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NK 750-6	6	63	57	740 ± 5% 150 bar	1207	1486	0-80	~50-100	1.8
NK 750-10	10	75	65		1310	1656	0-80	~50-100	1.8
NK 750-16	16	93	77		1390	1792	0-80	~50-100	1.8
NK 750-25	25	120	95		1450	1895	0-80	~50-100	1.8
NK 750-32	32	140	108		1496	1975	0-80	~50-100	1.8
NK 750-40	40	165	125		1496	1975	0-80	~50-100	1.8
NK 750-50	50	195	145		1513	2004	0-80	~50-100	1.8

适配件

NFC-MC-150




NFC-32



定单方式

氮气弹簧：NK750-6


适配件：NFC-MC-150

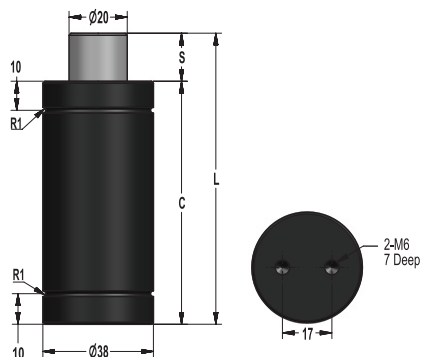


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NK 1000-6	6	61	55	1060 $\pm$ 5% 150 bar	1902	2412	0-80	~50-100	1.8
NK 1000-10	10	78	68		1834	2297	0-80	~50-100	1.8
NK 1000-16	16	100	84		1814	2264	0-80	~50-100	1.8
NK 1000-25	25	135	110		1769	2190	0-80	~50-100	1.8
NK 1000-32	32	167	135		1701	2079	0-80	~50-100	1.8
NK 1000-40	40	195	155		1727	2121	0-80	~50-100	1.8
NK 1000-50	50	230	180		1750	2159	0-80	~50-100	1.8

适配件


NFCU-1000



NFC-250

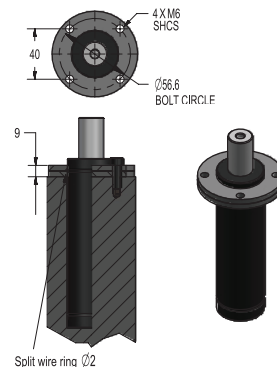


NFCS-250

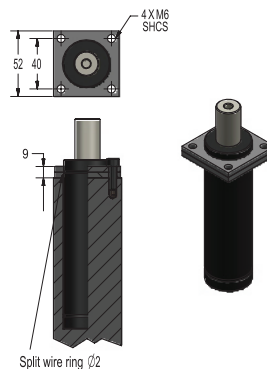

定单方式

氮气弹簧：NK1000-6


适配件：NFCU-1000

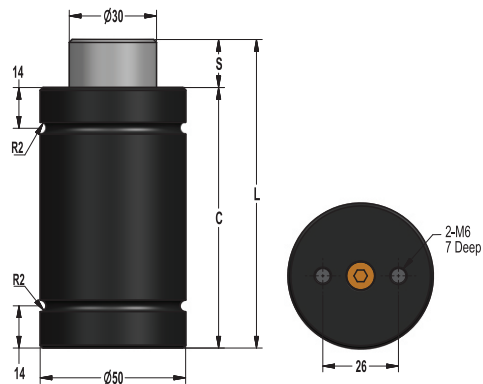


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NK 1800-6	6	66	60	1885 ± 5% 150 bar	3046	3731	0-80	~50-100	1.8
NK 1800-10	10	80	70		3125	3860	0-80	~50-100	1.8
NK 1800-16	16	106	90		2979	3623	0-80	~50-100	1.8
NK 1800-25	25	135	110		3133	3874	0-80	~50-100	1.8
NK 1800-32	32	162	130		3106	3830	0-80	~50-100	1.8
NK 1800-40	40	190	150		3135	3877	0-80	~50-100	1.8
NK 1800-50	50	220	170		3236	4043	0-80	~50-100	1.8
NK 1800-65	65	271	206		3262	4086	0-80	~50-100	1.8

适配件

NFCU-1800




NFCS-1800



定单方式

氮气弹簧：NK1800-6


适配件：NFCU-1800

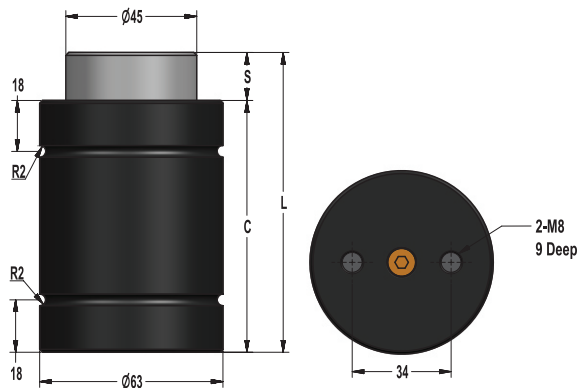

型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NK 3000-10	10	85	75	2945 ± 5% 150 bar	5084	6363	0-80	~80-100	1.8
NK 3000-16	16	103	87		5362	6829	0-80	~80-100	1.8
NK 3000-25	25	130	105		5566	7176	0-80	~80-100	1.8
NK 3000-32	32	150	118		5721	7443	0-80	~80-100	1.8
NK 3000-40	40	175	135		5722	7445	0-80	~80-100	1.8
NK 3000-50	50	205	155		5778	7542	0-80	~80-100	1.8
NK 3000-65	65	256	191		5630	7287	0-80	~80-100	1.8

适配件


NFCS-1500

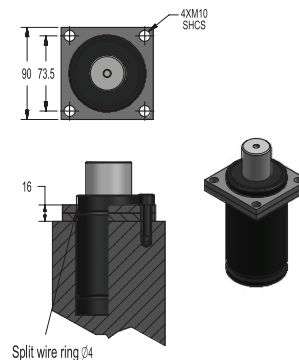

定单方式

氮气弹簧：NK3000-10


适配件：NFCS-1500

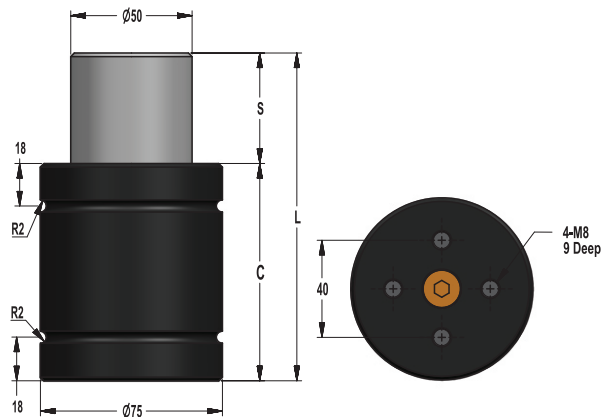


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NK 4700-10	10	80	70	4675 ± 5% 150 bar	8017	10013	0-80	~80-100	1.8
NK 4700-16	16	106	90		7467	9112	0-80	~80-100	1.8
NK 4700-25	25	135	110		7780	9622	0-80	~80-100	1.8
NK 4700-32	32	167	135		7447	9079	0-80	~80-100	1.8
NK 4700-40	40	200	160		7360	8939	0-80	~80-100	1.8
NK 4700-50	50	240	190		7326	8883	0-80	~80-100	1.8
NK 4700-65	65	273	208		7926	9862	0-80	~80-100	1.8

适配件

NFP-4700




NFCS-1500



定单方式

氮气弹簧：NK4700-10


适配件：NFP-4700

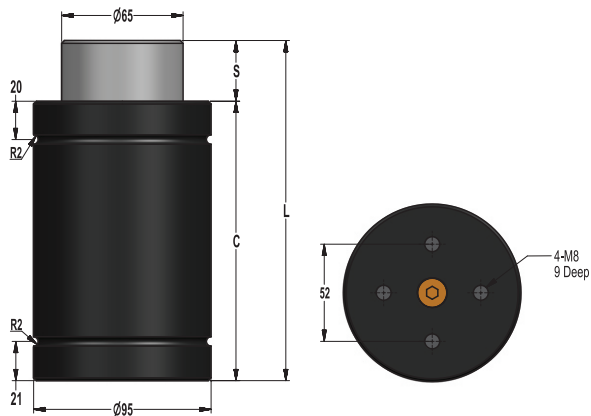


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NK 7500-10	10	90	80	7540 ± 5% 150 bar	11910	14481	0-80	~80-100	1.8
NK 7500-16	16	116	100		11563	13924	0-80	~80-100	1.8
NK 7500-25	25	145	120		12169	14901	0-80	~80-100	1.8
NK 7500-32	32	182	150		11486	13800	0-80	~80-100	1.8
NK 7500-40	40	210	170		11697	14138	0-80	~80-100	1.8
NK 7500-50	50	255	205		11502	13825	0-80	~80-100	1.8
NK 7500-65	65	279	214		12826	15978	0-80	~80-100	1.8

适配件

NFP-7500




NFCS-3000

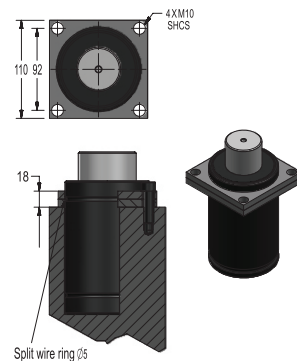

定单方式

氮气弹簧：NK7500-10


适配件：NFP-7500

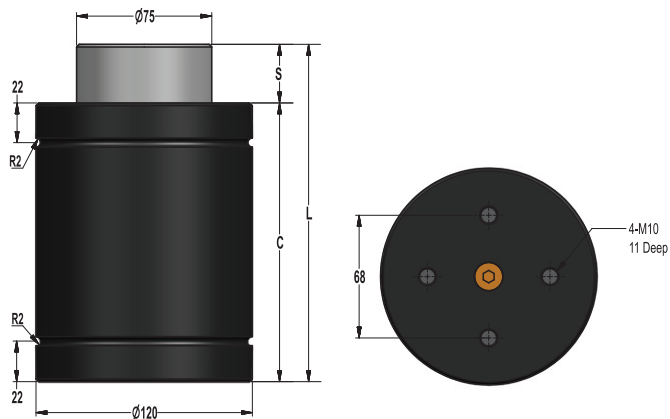


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NK 12000-10	10	100	90	11780 ± 5% 150 bar	17843	21398	0-80	~50-100	1.8
NK 12000-16	16	126	110		17646	21084	0-80	~50-100	1.8
NK 12000-25	25	155	130		18657	22704	0-80	~50-100	1.8
NK 12000-32	32	187	155		18166	21913	0-80	~50-100	1.8
NK 12000-40	40	220	180		18098	21805	0-80	~50-100	1.8
NK 12000-50	50	260	210		18116	21834	0-80	~50-100	1.8
NK 12000-65	65	320	255		18133	21860	0-80	~50-100	1.8

适配件


NFCU-11800



NFC-5000




NFCS-5000



定单方式

氮气弹簧：NK12000-10


适配件：NFCU-11800

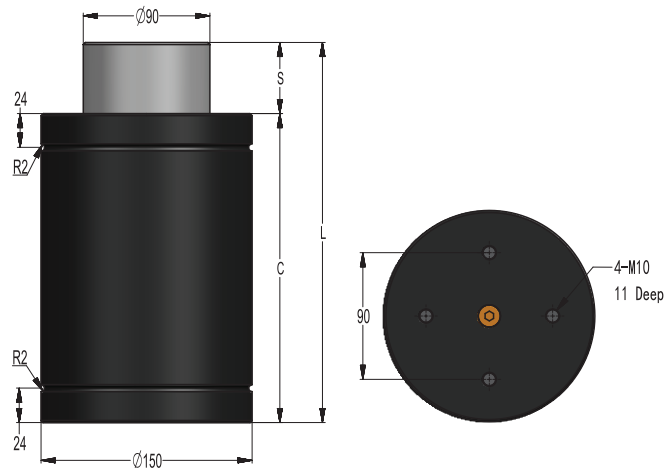


型号	行程 (S)	总长 (L)	缸体 (C)	初始力(daN) 和 充气压力	静态 终止力 (daN)	动态 终止力 (daN)	使用 温度 (C°)	冲压 次数 (SPM)	冲压 速度 (m/s)
NK 18500-10	10	110	100	18410 ± 5% 150 bar	25880	30288	0-80	~50-100	1.8
NK 18500-16	16	136	120		26201	20788	0-80	~50-100	1.8
NK 18500-25	25	165	140		27771	33260	0-80	~50-100	1.8
NK 18500-32	32	197	165		27347	32588	0-80	~50-100	1.8
NK 18500-40	40	235	195		26947	31957	0-80	~50-100	1.8
NK 18500-50	50	270	220		27505	32838	0-80	~50-100	1.8
NK 18500-65	65	323	258		28055	33713	0-80	~50-100	1.8

适配件


NFCU-18300



NFC-7500



NFC5-7500



定单方式

氮气弹簧：NK18500-10

适配件：NFCU-18300



Nitrogen Gas Spring Technology

嘉兴柏慕机电有限公司

地址：浙江省嘉兴市嘉善县人民大道2501号

电话：0573-8910 2596

传真：0573-8910 2597

邮箱：justin.zhang@bamotech.com.cn

网站：www.bamotech.com.cn

